

# CAVIUS


WIRELESS  
ALARM FAMILY  
**SMOKE**  
ALARM



DANISH  
DESIGN



**5** YEAR  
BATTERY



**100%**  
TESTED



WIRELESS  
ALARM FAMILY  
**SMOKE**  
ALARM



reddot award 2016  
winner



EN14604 : 2005/AC:2008  
DoP no. : 2103-001





**PRODUCT NAME:** CAVIUS RF SMOKE ALARM, 5 YEAR 65MM

**PRODUCT NUMBER:** 2103

## PRODUCT DATA:

### DEVICE TYPE:

Optical smoke alarm device with wireless interlink.

### USAGE:

Designed for installation in private homes, camping trailers, mobile homes and caravans.

This alarm can be connected with other alarms from the CAVIUS Wireless alarm family or function as a stand alone alarm.

Max covering area 60m<sup>2</sup>.

### FUNCTION:

The alarm makes an optical reading every 8 seconds. At unusual readings (going into alarm stage), the readings are taken every 2 seconds.

### INSTALLATION POSITION:

Wall & ceiling. Set of 2 x screws and 2 x plugs included.

### PRODUCT DIMENSIONS:

D: 65 mm. x H: 43 mm.

### PRODUCT WEIGHT:

Base alarm weight (excluding screws, plugs and mounting ring): 50 g.

### OPERATION AC/DC:

DC

### BATTERY TYPE:

Duracell, Panasonic or Huiderui replaceable 3v CR123A lithium battery 1600mAh.

### BATTERY LIFE:

Minimum 5 year life in normal operating condition. (Based on a weekly testing).

### POWER CONSUMPTION:

Battery consumption is 161mAh in the non alarm condition.

### LOW BATTERY INDICATION:

A short acoustic "beep" will sound and LED flash every 48 seconds when the voltage is below 2.85V. In this stage it will continue for minimum 30 days, and can drive the alarm for 4 minutes.

### INTERLINK FREQUENCY:

868MHz

### SIGNALS:

Transmits RF signals to the CAVIUS Wireless Family at alarm.

### NORMAL OPERATION:

LED flashes every 48 second for normal operation.

### INTERLINK RANGE:

Minimum 100m in open field. Range depends on the building materials and will need to be tested in each individual case.

### SOUND:

Audible indicator min. 85 dB @ 3 meter in anechoic chamber.

### SOUND PATTERN:

Fire alarm condition is indicated by a series of three successive tones.

### VISIBLE INDICATOR:

A red LED is used to indicate the following conditions:

- fire alarm condition is indicated by a flash every 0.5 seconds
- smoke sense speed up is indicated by a flash every 2 seconds when the smoke level is at the alarm threshold
- normal operation is indicated by a flash every 48 seconds

### PUSH BUTTON:

The smoke detector includes a push button switch built into the top of the alarm for easy access. This button has the following functions:

- set up - press the button to start sending out a specific house code to the others alarms
- hush – during an alarm condition this immediately silences the alarm when pressed. When the button is released, the alarm remains silenced for 10 minutes
- test – when not in alarm the sounder can be activated to provide a sensor OK test function. While the button is pressed, the audible and visible indicators are activated if the sensor is OK



# CAVIUS

**PRODUCT NAME:** CAVIUS RF SMOKE ALARM, 5 YEAR 65MM

**PRODUCT NUMBER:** 2103

## PRODUCT DATA:

### DETECTION TIMING:

The smoke detector is reading every 8 seconds, every 2 seconds at unusual readings (alarm stage).

### ISOTOPE ACTIVITY:

Absence of radioactive substances.

### WARRANTY:

10 year

### APPROVALS:

EN 14604:2005  
EN60065  
RED  
RoHS  
REACH

### CE TESTING INSTITUTE:

CNPP

### NOTIFIED BODY:

AFNOR Certification

### ADDITIONAL TESTING AND APPROVALS:

SGS (RF Approval)

### NOTIFIED BODY NUMBER:

0333

### AWARDS:



reddot award 2016  
winner

### ASSOCIATIONS AND COMMITTEES:

CAVIUS is member of the NF292 committee.

CAVIUS is member of GIFSID, manufacturers' association of domestic fire safety equipment.

### OPERATING TEMPERATURE:

+4°C to +38°C (tested from 0 degrees to 55 degrees)

### OPERATING HUMIDITY:

Up to 90% RH non-condensing

### STORAGE TEMPERATURE:

-20°C to +60°C

### STORAGE HUMIDITY:

Up to 93% RH non-condensing

## QUALITY ASSURANCE:

### SOUND LEVEL:

100% tested in special designed sound chamber.

### SENSITIVITY:

100% tested in special designed test tunnel made by world leader AWT (UK).

### POWER CONSUMPTION:

100% tested

### BATTERY VOLTAGE AND INTERNAL RESISTANCE:

100% tested

### ALARM FUNCTION:

100% tested

### INTERCONNECTION:

100% tested

### VISUAL APPEARANCE:

100% tested

### PACKING CONTENT:

100% tested

## CONTACT


[www.cavius.com](http://www.cavius.com)

## MANUFACTURER

Manufacturer: Cavius Aps, DK8600

# CAVIUS

WIRELESS.  
ALARM FAMILY

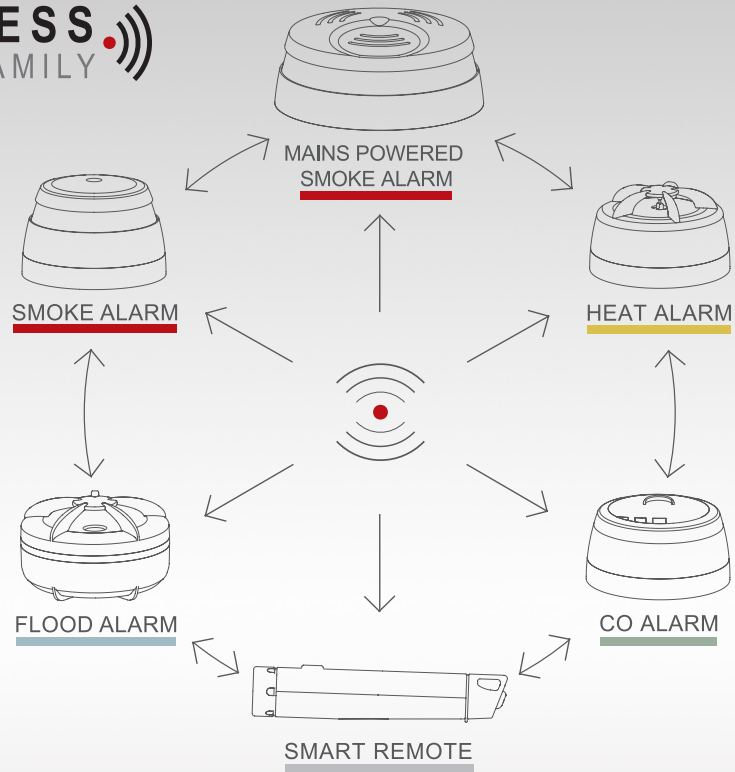

Diameter: 65 mm